




J5PG4024A1060*


TAG: _____

SUBMITTAL


2.0 Ton
LGWP Gas Package Unit
J5PG4024A1060*

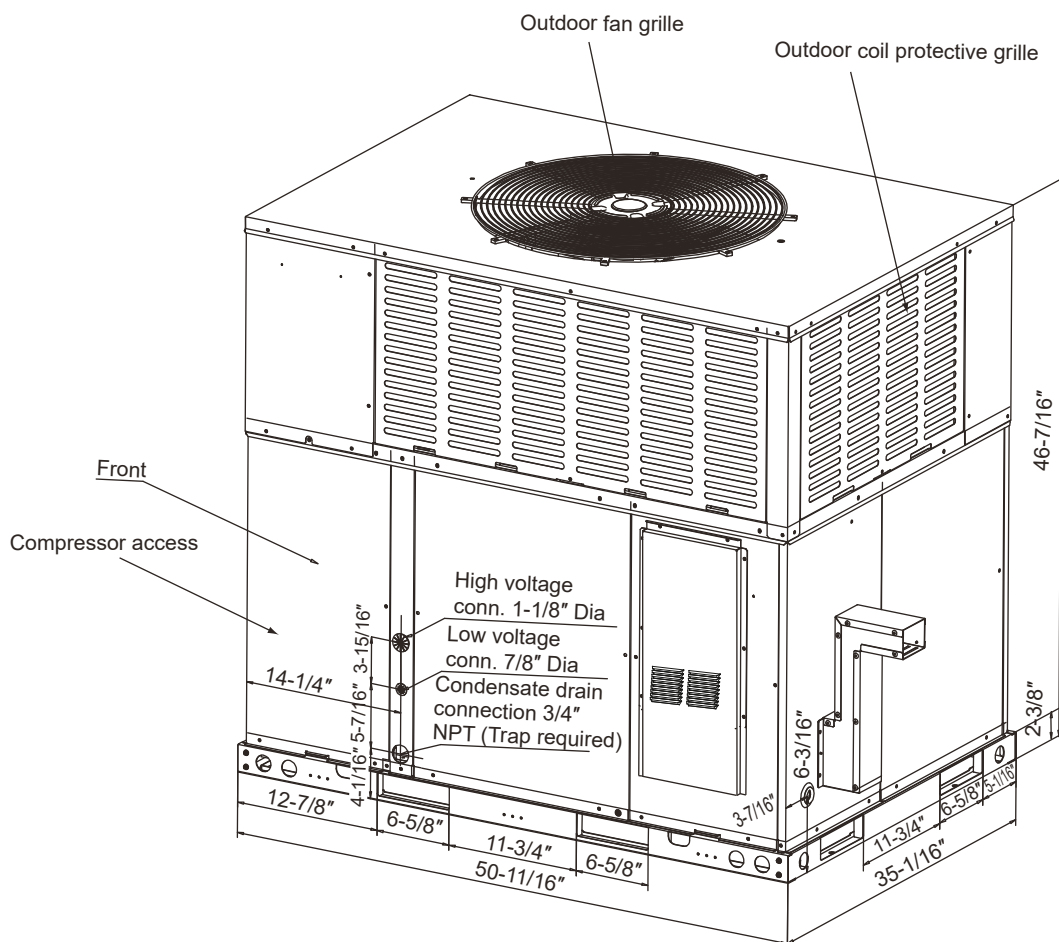

Bottom view

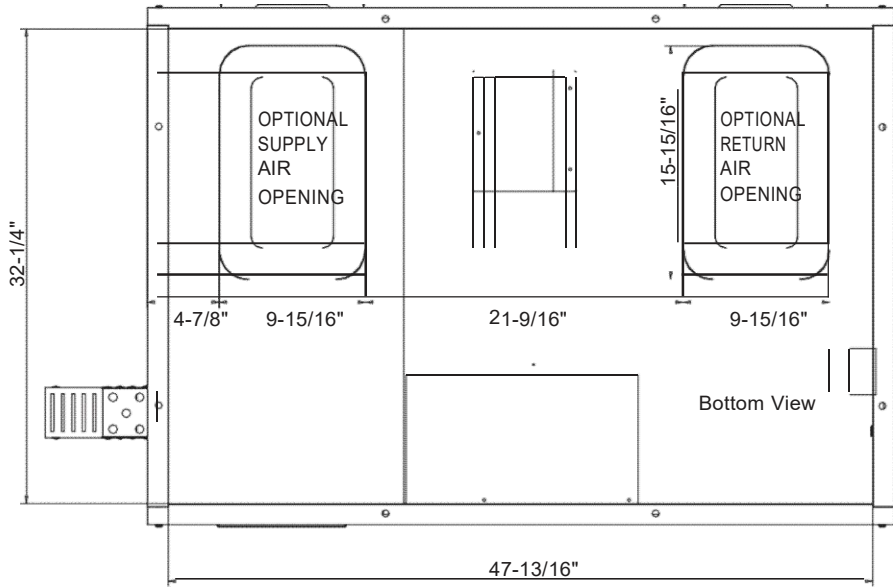

Back view

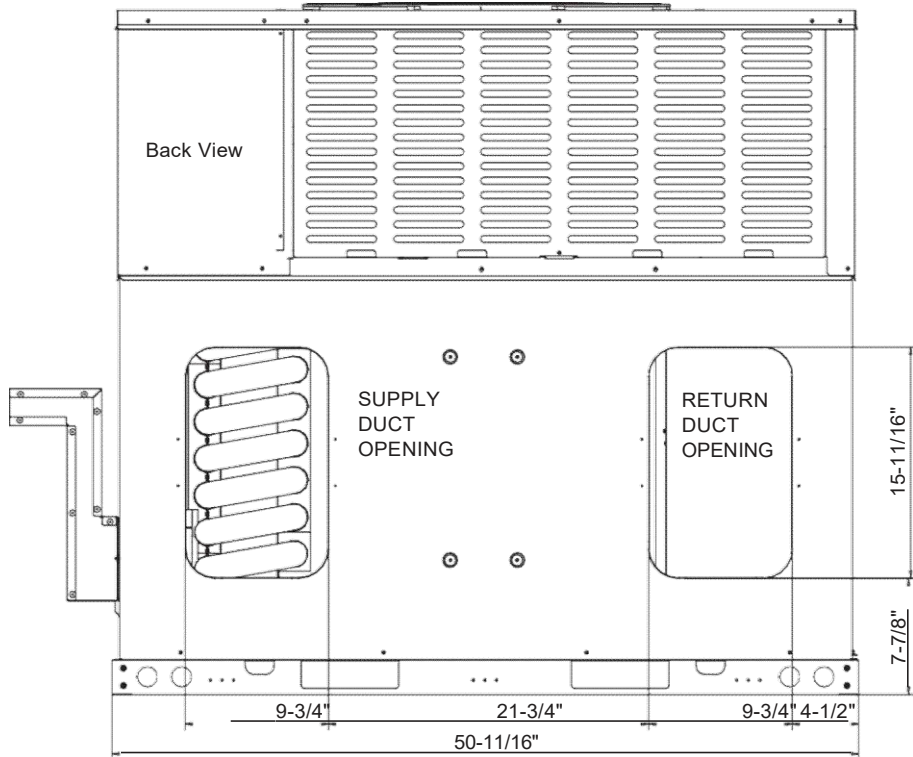

Dimensions Back and Bottom

Specifications

MODEL	J5PG4024A1060*
POWER CONNS. - V/PH/HZ	208/230/1/60
RATED CURRENT	18.8
MAXIMUM OVERCURRENT PROTECTION	29.8
SOUND POWER LEVEL [dB(A)]	79
GAS HEATING PERFORMANCE	
HEATING INPUT (Btu)	60,000
HEATING OUTPUT (Btu)	48,000
TEMP. RISE RANGE (°F)	30-70
AFUE (%)	81
GAS CONNS. PIPE SIZE	1/2
COMPRESSOR	ROTARY
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	11 - 55
CONDENSER FAN	PSC
DIA. (IN.)	23.6
TYPE DRIVE- NO. SPEEDS	AC - 1
MOTOR HP	1/12
MOTOR SPEED R.P.M.	840
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	0.8
CONDENSER COIL	Microchannel
ROWS- F.P.I.	2-23
FACE AREA (SQ. FT.)	14.2
TUBE SIZE (IN.)	/

EVAPORATOR FAN	ECM
DRIVE- NO. SPEEDS	DIRECT - 5
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	1/2
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	4.2
EVAPORATOR COIL	Aluminum tube&fin
ROWS- F.P.I.	4- 17
FACE AREA (SQ. FT.)	3.97
TUBE SIZE (IN.)	9/32
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-454B	2 LBS. - 10 OZ.
REFRIGERANT SENSOR	NO
DIMENSIONS	W X H X D
CRATED (IN.)	51-7/16X48-5/8X37
WEIGHT	
SHIPPING (LBS.)	443
NET (LBS.)	422

Fan Performance Table

[illegible]

Features

- Single-stage gas heating (LP conversion kit provided with each unit).
- Bottom or side air return.
- Uses more environmentally friendly R454B refrigerant.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.
- Coil has hydrophilic coating which improves corrosion resistance.
- Anti-rust steel cabinets, 500-hour salt spray tested.
- High efficiency compressors operate smoothly, quietly, and consistently.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J5PG4024A1060A-1A