


TAG: _____

SUBMITTAL

3 Ton Split System Heat Pump - 1 Phase J5HP5036A1000AA

Product Specifications

| | |
|-----------------------------------|-------------------------|
| OUTDOOR UNIT | J5HP5036A1000AA |
| POWER CONNS. — V/PH/HZ | 208/230V/1Ph/60Hz |
| MIN. BRCH. CIR. AMPACITY | 21.5 |
| BR. CIR. PROT. RTG. - MAX. (AMPS) | 37.5 |
| COMPRESSOR | SCROLL |
| NO. USED - NO. SPEEDS | 1 - 1 |
| VOLTS/PH/HZ | 208/230V/1Ph/60Hz |
| R.L. AMPS - L.R. AMPS | 16-86 |
| FACTORY INSTALLED | |
| START COMPONENTS | NO |
| INSULATION/SOUND BLANKET | NO |
| COMPRESSOR HEAT | YES |
| RATED SOUND POWER LEVEL (dB) | 77 |
| OUTDOOR FAN/MOTOR | PROPELLER/ECM |
| DIA. (IN.) - NO. USED | 23-5/8 - 1 |
| TYPE DRIVE - NO. SPEEDS | EXTERNAL - 10 |
| CFM @ 0.0 IN. W.G. | 2880 |
| NO. MOTORS - HP | 1 - 1/3 |
| MOTOR SPEED R.P.M | 930 |
| VOLTS/PH/HZ | 208/230V/1Ph/60Hz |
| F.L. AMPS | 1.5 |
| OUTDOOR COIL — TYPE | PLATE FIN |
| ROWS - F.P.I. | 2-21 |
| FACE AREA (SQ. FT.) | 13.6 |
| TUBE SIZE (IN.) | 3/16 |
| REFRIGERANT | |
| LBS. — R-454B (O.D. UNIT) | 5LBS.-9OZ. |
| FACTORY SUPPLIED | YES |
| LINE SIZE - IN. O.D. GAS | 3/4 |
| LINE SIZE - IN. O.D. LIQ. | 3/8 |
| CHARGING SPECIFICATION | |
| SUPERHEAT | See Installation Manual |
| DIMENSIONS | W × H × L |
| CRATED (IN.) | 30-1/5×26-1/4×30-1/5 |
| WEIGHT | |
| SHIPPING (LBS.) | 171 |
| NET (LBS.) | 165 |

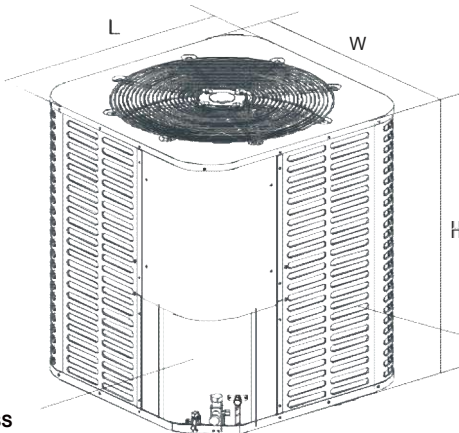


AIR INLETS
LOUVERED PANELS
ALLOW 12"
MINIMUM
CLEARANCE

SERVICE ACCESS
ALLOW 24" CLEARANCE

NOTE: GRILL
APPEARANCE MAY VARY.

POWER WIRING
7/8" (22.2mm)



CONTROL WIRING
7/8" (22.2mm)

ACCESS VALVE
FOR LOW
PRESSURE

NOTE:
ONLY ADOPTED BY HEAT PUMP,
CAN BE USED FOR MEASURING
PRESSURE AFTER SWITCHOVER
VALVE-SUCTION TO COMPRESSOR
OR REFRIGERANT CHARGE

SERVICE
FITTING

SERVICE
FITTING

LIQUID LINE
CONNECTION

SUCTION LINE
CONNECTION

NOTE: All dimensions are in inches.

| Model | W | H | L | GAS VALVE SIZE | LIQUID VALVE SIZE |
|-----------------|--------|----------|--------|----------------|-------------------|
| J5HP5036A1000AA | 29-1/8 | 24-15/16 | 29-1/8 | 3/4 | 3/8 |

Mechanical Specification Options

General

The J5HP50 is fully charged from the factory for 15ft of lineset. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with air handlers and furnace coils that are AHRI certified. The unit is certified to ETL. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, Galvanized steel and painted with a weather-resistant powder paint on all grilles, panels, pre-paint on all other panels. And had 500-hours salt spray tested.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor.

Compressor

Features include low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by grille panels. The coil has a hydrophilic coating.

Optional accessories

via 3rd party -Liquid

Line Drier

It is used to filter out impurities and water in the system, ensures system clean and dry.



OXBOX has a policy of continuous product and product data improvement and it reserves the right to change design and specifications without notice.

BX-PRQ- J5HP5036A1000AA-1A